

Stockmaster Ladder Systems The Safer Way



Stockmaster ladder systems are more than a set of warehouse steps. Simple to use the system includes an integral safety gate, automatic retracting wheels and an optional lift platform to access loads weighing up to 60 kg from racking up to 5 metres from floor level.

All aluminium construction - lightweight - robust. Integral safety rail around the platform with an automatic closing safety gate to prevent the operator walking back off the platform by accident.


Southworth Handling Ltd.
Unit 3 Berkshire Business Centre
Thatcham RG19 4EW

Phone: 01635 874404
Fax: 01635 874027



Handling Problem? - Simple Solution!


Navigator

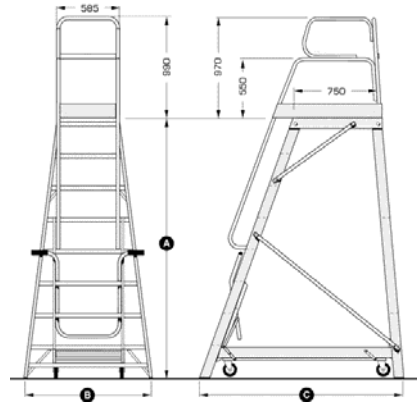

- Handle controls automatic wheel retraction giving the ladder a very safe base.
- Available with platform heights from 750 to 4015 mm.
- Automatic gate on platform
- Integral safety rail.
- All aluminium construction.


Model	A	B	C
SM-N4	1145	755	1295
SM-N5	1435	795	1425
SM-N6	1720	835	1555
SM-N7	2005	875	1685
SM-N8	2295	915	1815
SM-N9	2580	955	1945
SM-N10	2865	995	2075
SM-N11	3155	1035	2205
SM-N12	3440	1075	2335
SM-N13	3725	1115	2465
SM-N14	4015	1155	2595

Note: All Dimensions in mm.

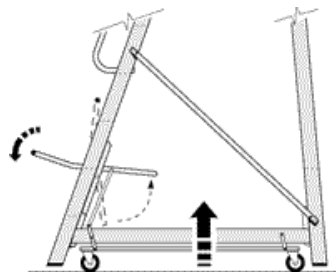

Navigator with control actuated


WinchTruk

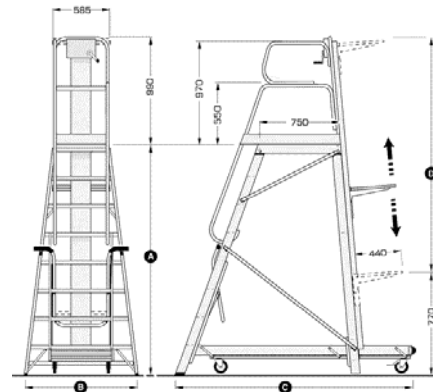

- Platform allows access to loads at up to 5 metres and lowered to floor level safely.
- Available with platform heights from 750 to 4015 mm.
- Automatic gate on platform
- Integral safety rail.
- All aluminium construction.

Model	C	D	TIME D/SEC
SM-N4/LT	1815	1365	12.8 s
SM-N5/LT	1945	1650	15.6 s
SM-N6/LT	2075	1940	18.4 s
SM-N7/LT	2205	2225	21.2 s
SM-N8/LT	2335	2510	24.0 s
SM-N9/LT	2465	2800	26.8 s
SM-N10/LT	2595	3085	29.5 s
SM-N11/LT	2725	3375	32.4 s
SM-N12/LT	2855	3660	35.1 s
SM-N13/LT	2985	3945	37.9 s
SM-N14/LT	3115	4235	40.7 s

Note: All dimensions in millimetres

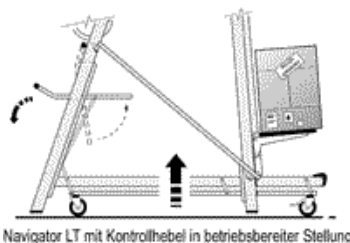

Navigator LT mit Kontrollhebel in betriebsbereiter Stellung